



Stationary electric wire rope hoist - Reeving 1/1

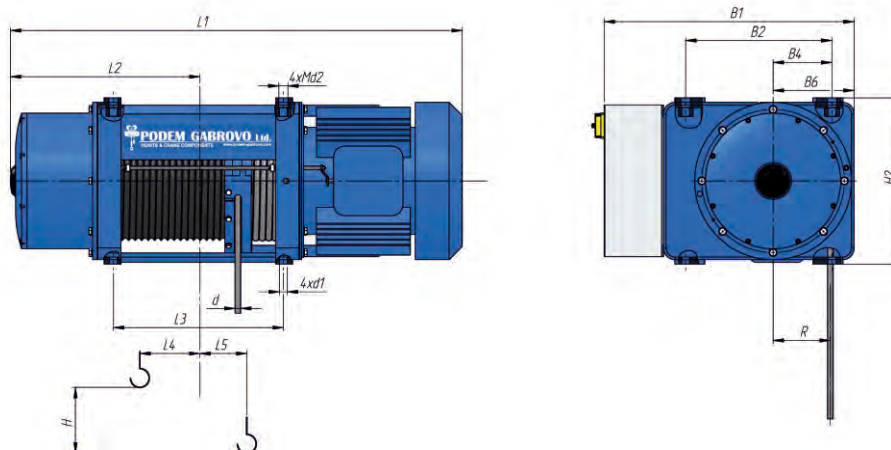


Type	Lifting height, H, m	Weight, kg V1,V2 / V1M1,V2M2	Capacity, kg	General dimensions, mm																								
				L1				L2	L3	L4	L5	B1	B2	B4	B6	H2	R	d	d1	d2								
				V1	V1/M1	V2	V2/M2																					
MT 305	12	105/125	500	720	760	720	760	320	224	93	77	580	295	105	159	321	90	7	15	M14								
	19	825		865	825	865	370	329	145	130																		
	26	925		965	925	965	420	429	195	180																		
	40,5	1125		1165	1125	1165	520	629	295	280																		
	54,5	1325		1365	1325	1365	620	829	395	380																		
MT 405	72,5	275/320	1425	1495	1425	1495	670	841	393	377	650	325	127,5	184	366	120,5	17	M20										
MT 505	81	295/340	1530	1615	1560	1615	715	931	438	422																		
	102	590/620	1750	1835	1780	1835	825	1151	548	532																		
MT 308	12	105/125	800	720	760	720	760	320	224	93									77	580	295	105	159	321	90	7	15	M14
	19	825		865	825	865	370	329	145	130																		
	26	925		965	925	965	420	429	195	180																		
	40,5	1125		1165	1125	1165	520	629	295	280																		
	54,5	1325		1365	1325	1365	620	829	395	380																		
MT 410	10	195/240	1000	815	885	815	885	365	231	89	61	650	325	127,5	184	366	122	10	17	M20								
	17	925		995	925	995	420	341	144	116																		
	24	1025		1095	1025	1095	470	441	194	166																		
	37	1225		1295	1225	1295	570	641	294	266																		
	50,5	1425		1495	1425	1495	670	841	394	366																		
MT 610	67	500/550	1540	1630	1575	1630	715	873	403	382	760	390	157	220	432	157,5	21	M24										
	76	630/700	1645	1735	1680	1735	770	978	456	434																		
	91,5	750/810	1820	1910	1855	1910	860	1153	543	522																		
MT 516	10	228/293	1600	860	945	890	945	380	261	102	76	650	325	127,5	184	366	123 (122)	12 (10)	17	M20								
	16	240/305		980	1065	1010	1065	440	381	164	136																	
	22,5	255/320		1090	1175	1120	1175	495	491	219	191																	
	34,5	295/360		1310	1395	1340	1395	605	711	329	301																	
	46,5	325/388		1530	1615	1560	1615	715	931	439	411																	
MT 616	59	505/595	1750	1835	1780	1835	825	1151	549	521	760	390	157	220	432	158,5 (157,5)	21	M24										
	55,5	500/550	1540	1630	1575	1630	715	873	403	382																		
	63	630/700	1645	1735	1680	1735	770	978	456	434																		
MT 625	73,5	750/810	1820	1910	1855	1910	860	1153	543	522	760	390	157	220	432	160 (159)	15 (13)	21	M24									
	14,5	365/460	1015	1105	1050	1105	445	348	146	109																		
	20,5	328/482	1120	1210	1155	1210	505	453	198	162																		
	33	437/537	1330	1420	1365	1420	610	663	303	267																		
	45	485/252	1540	1630	1575	1630	715	873	407	372																		
MT 725	51	630/700	1645	1735	1680	1735	770	978	461	424	900	475	186,5	270	530	178,5 (177,5)	25	M27										
	61	805/865	1820	1910	1855	1910	860	1153	548	512																		
	66,5	840/900	1890	1925	-	-	890	1143	531	499																		
MT 740	80	895/955	2100	2135	-	-	995	1353	636	604	900	475	186,5	270	530	180 (178,5)	18 (15)	25	M27									
	15	635/690	1140	1175	-	-	515	393	158	117																		
	24	670/730	1300	1335	-	-	595	553	238	197																		
	33,5	730/790	1460	1495	-	-	675	713	318	277																		
	45,5	790/850	1675	1710	-	-	785	928	426	384																		
MT 750	57,5	840/900	1890	1925	-	-	890	1143	533	492	900	475	186,5	270	558	180 (178,5)	18 (15)	31	-									
	69,5	900/955	2100	2135	-	-	995	1353	368	597																		
	15	760/820	1217	1252	-	-	592	393	158	117																		
	24	800/860	1377	1412	-	-	672	553	238	197																		
	33,5	870/930	1537	1572	-	-	752	713	318	277																		
MT 763	45,5	930/990	1752	1787	-	-	862	928	426	384	900	475	186,5	270	558	180 (178,5)	18 (15)	31	-									
	57,5	980/1040	1967	2002	-	-	967	1143	533	492																		
	69,5	1040/1100	2177	2212	-	-	1072	1353	368	597																		
	15	760/820	1217	1252	-	-	592	393	158	117																		
	24	800/860	1377	1412	-	-	672	553	238	197																		

Stationary electric wire rope hoist - Reeving 2/2

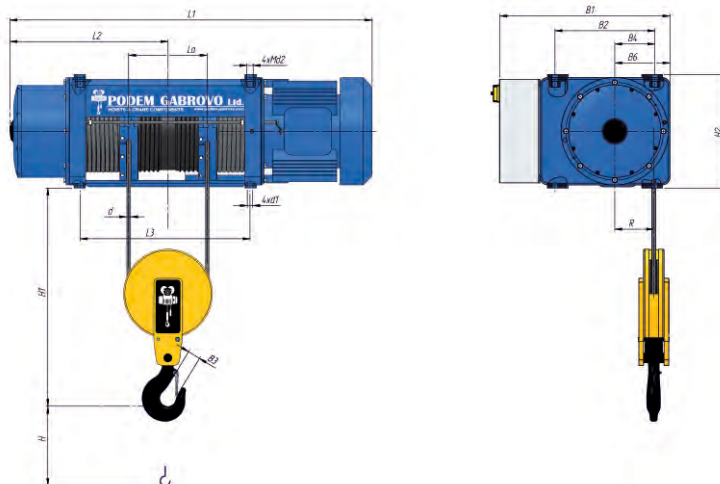


Type	Lifting height, H, m	Weight, kg V1/V2 / V1M1/V2M2	Capacity, kg	General dimensions, mm																	
				L1				L2	L3	Lo min	B1	B2	B3	B4	B6	H1	H2	R	d	d1	d2
				V1	V1/M1	V2	V2/M2														
MT 305	11	115/140	500	925	965	925	965	420	429	110	580	295	34	105	159	450	321	89	5	15	M14
	20,5	130/155		1125	1165	1125	1165	520	629												
	29,5	145/165		1325	1365	1325	1365	620	829												
MT 405	15	215/260	500	1025	1095	1025	1095	470	441	110	650	325	34	127,5	184	450	366	119,5	5	17	M20
MT 505	31,5	320/370		1310	1395	1340	1395	605	711												
MT 308	11	115/140	800	925	965	925	965	420	429	110	580	295	34	105	159	450	321	89	5	15	M14
	20,5	130/155		1125	1165	1125	1165	520	629												
	29,5	145/165		1325	1365	1325	1365	620	829												
MT 410	10	220/260	1000	1025	1095	1025	1095	470	441	110	650	325	34	127,5	184	450	366	120,5	7	17	M20
	19,5	255/305		1225	1295	1225	1295	570	641												
	29	280/325		1425	1495	1425	1495	670	841												
MT 610	39,5	530/590	1000	1540	1630	1575	1630	715	873	110	760	390	34	157	220	450	432	156	7	21	M24
	46,5	630/700		1645	1735	1680	1735	770	978												
	56,5	750/810		1820	1910	1855	1910	860	1153												
MT 516	7	255/310	1600	1090	1175	1120	1175	495	491	155	650	325	40	127,5	184	550	366	122	10	17	M20
	14,5	290/345		1310	1395	1340	1395	605	711												
	22	320/375		1530	1615	1560	1615	715	931												
MT 616	29	450/490	1600	1750	1835	1780	1835	825	1151	155	760	390	40	157	220	550	432	157,5	10	21	M24
	25,5	530/590		1540	1630	1575	1630	715	873												
	30,5	630/700		1645	1735	1680	1735	770	978												
MT 625	37,5	750/810	2500	1820	1910	1855	1910	860	1153	200	760	390	45	157	220	620	432	158,5	12	21	M24
	11,5	440/540		1330	1420	1365	1420	610	663												
	19	530/590		1540	1630	1575	1630	715	873												
MT 725	22,5	630/700	2500	1645	1735	1680	1735	770	978	200	760	390	45	157	220	620	432	158,5	12	21	M24
	29	750/810		1820	1910	1855	1910	860	1153												
	31	780/830		1890	1925	-	-	890	1143												
MT 740	39,5	795/855	4000	2100	2135	-	-	995	1353	240	900	475	50	186,5	270	710	530	178,5	15	25	M27
	10	640/700		1460	1495	-	-	675	713												
	16,5	675/735		1675	1710	-	-	785	928												
MT 750	24	740/800	5000	1890	1925	-	-	890	1143	240	900	475	50	186,5	270	710	558	178,5	15	31	M27
	30,5	795/855		2100	2135	-	-	995	1353												
	10	660/720		1537	1572	-	-	752	713												
MT 763	16,5	940/1000	6300	1752	1787	-	-	862	928	240	900	475	50	186,5	270	710	558	178,5	15	31	M27
	24	990/1050		1967	2002	-	-	967	1143												
	30,5	1055/1110		2177	2212	-	-	1072	1353												

Stationary electric wire rope hoist - Reeving 2/1

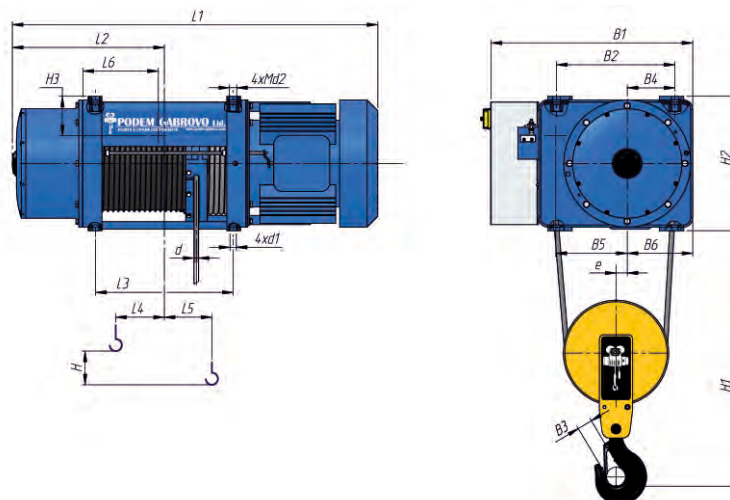


Type	Lifting height, H, m	Weight, kg V1,V2 / V1M1,V2M2	Capacity, kg	General dimensions, mm																																			
				L1				L2	L3	L4	L5	L6	B1	B2	B3	B4	B5	B6	H1	H2	H3	d	d1	d2	e														
				V1	V1/M1	V2	V2/M2																																
MT 305	6	106/126	1000	720	760	720	760	320	224	45	40	145	580	295	34	105	190,5	159	450	321	73	7	15	M14	50														
	9,5	115/135		825	865	825	865	370	329	95	90	245																											
	13	126/146		925	965	925	965	420	429	95																													
	20	135/157		1125	1165	1125	1165	520	629	195																													
	27	147/170		1325	1365	1325	1365	620	829	295																													
MT 405	36	550/610	1425	1495	1425	1495	670	841	307	74	240	650	325	127,5	199	184	366	90			17	M20	35																
MT 505	40,5	330/395	1530	1615	1560	1615	715	931	345	79																													
	51	500/600	1750	1835	1780	1835	825	1151	455																														
MT 308	6	105/125	1600	720	760	720	760	320	224	45	40	145	580	295	40	105	190,5	159	450	321	73	7	15	M14	50														
	9,5	115/135		825	865	825	865	370	329	95	90	245																											
	13	125/145		925	965	925	965	420	429	95																													
	20	135/157		1125	1165	1125	1165	520	629	195																													
	27	147/170		1325	1365	1325	1365	620	829	295																													
MT 410	5	200/245	2000	815	885	815	885	365	231	52	27	140	650	325	40	127,5	199	184	550	366	96	10	17	M20	35														
	8,5	220/260		925	995	925	995	420	341	107	74	240																											
	12	230/270		1025	1095	1025	1095	470	441	107																													
	18,5	260/305		1225	1295	1225	1295	570	641	207																													
	25	285/330		1425	1495	1425	1495	670	841	307																													
MT 610	33,5	490/530	1540	1630	1575	1630	715	873	316	73	250	760	390	157	235	220	432	116			21	M24	38																
	38	520/560	1645	1735	1680	1735	770	978	367																														
	45,5	690/950	1820	1910	1855	1910	860	1153	455																														
MT 516	5	228/293	3200	860	945	890	945	380	261	60	29	150	650	325	45	127,5	199	184	620	366	86	12 (10)	17	M20	35														
	8	245/310		980	1065	1010	1065	440	381	120	79	250																											
	11	260/325		1090	1175	1120	1175	495	491	125																													
	17	300/365		1310	1395	1340	1395	605	711	235																													
	23	325/390		1530	1615	1560	1615	715	931	345																													
MT 616	29,5	660/720	1750	1835	1780	1835	825	1151	455	73	250	760	390	157	235	220	432	116			21	M24	38																
	27,5	490/530	1540	1630	1575	1630	715	873	316																														
	31,5	520/560	1645	1735	1680	1735	770	978	367																														
	37,5	690/950	1820	1910	1855	1910	860	1153	455																														
MT 625	7	370/470	5000	1015	1105	1050	1105	445	348	104	23	154	760	390	50	157	235	220	710	432	110	15 (13)	21	M24	38														
	10	390/490		1120	1210	1155	1210	505	453	106	73	254																											
	16,5	445/545		1330	1420	1365	1420	610	663	211																													
	22,5	495/595		1540	1630	1575	1630	715	873	316																													
	25,5	520/560		1645	1735	1680	1735	770	978	367																													
MT 725	30,5	690/950	1820	1910	1855	1910	860	1153	455	104	340	900	475	186,5	290,5	270	530	162			25	M27	55																
	33	845/905	1890	1925	-	-	890	1143	408															54	240														
	40	905/965	2100	2135	-	-	995	1353	512																														
	7,5	635/695	1140	1175	-	-	515	393	82																														
	12	670/730	1300	1335	-	-	595	553	162																														
MT 740	16,5	735/795	1460	1495	-	-	675	713	192	104	340	900	475	56	186,5	290,5	270	840	530	157	18 (15)	25	M27	55															
	22,5	795/855	1675	1710	-	-	785	928	300																														
	28,5	845/905	1890	1925	-	-	890	1143	408																														
	34,5	905/965	2100	2135	-	-	995	1353	512																														
MT 750	7,5	760/820	10000	1217	1252	-	-	592	393	82	54	240	900	475	71	186,5	290,5	270	840	558	157	18 (15)	31	---	55														
	12	800/860		1377	1412	-	-	672	553	162	104	340																											
	16,5	870/930		1537	1572	-	-	752	713	192																													
	22,5	930/990		1752	1787	-	-	862	928	300																													
	28,5	980/1040		1967	2002	-	-	967	1143	408																													
MT 763	34,5	1045/1106	2177	2212	-	-	1072	1353	512	54	240	900	475	71	186,5	290,5	270	840	558	157	18 (15)	31	---	55															
	7,5	760/820	1217	1252	-	-	592	393	82																104	340													
	12	800/860	1377	1412	-	-	672	553	162																														
	16,5	870/930	1537	1572	-	-	752	713	192																														
	22,5	930/990	1752	1787	-	-	862	928	300																														
MT 763	28,5	980/1040	1967	2002	-	-	967	1143	408	104	340	900	475	71	186,5	290,5	270	840	558	157	18 (15)	31	---	55															
	34,5	1045/1106	2177	2212	-	-	1072	1353	512																														

Stationary electric wire rope hoist - Reeving 4/2

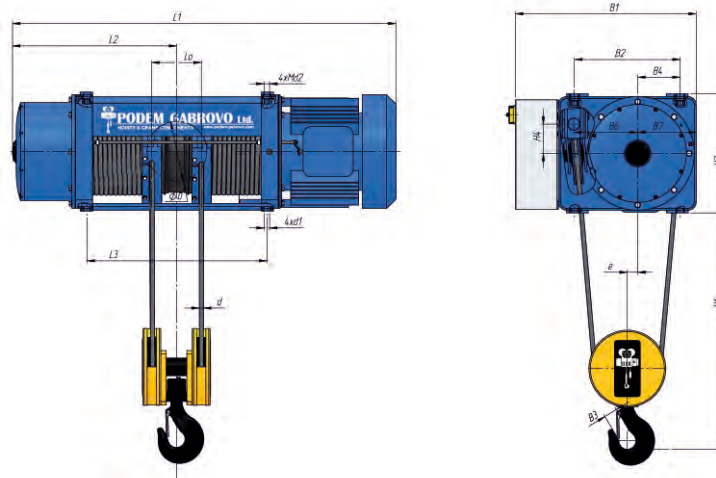

Type	Lifting height, H, m	Weight, kg V1,V2 / V1M1,V2M2	Capacity, kg	General dimensions, mm																					
				L 1				L2	L3	Lo min	B1	B2	B3	B4	B6	B7	H1	H2	H4	D	d	d1	d2	e	
				V1	V1/M1	V2	V2/M2																		
MT 305	10	160/175	1000	1125	1165	1125	1165	520	629	110	650	295	40	105	190,5	159	415	321	75	100	5	15	M14	50	
	14,5	175/195		1325	1365	1325	1365	620	829		730	325		127,5	199	184		366	91			17	M20	35	
MT 405	7,5	290/340		1025	1095	1025	1095	470	441									101							
MT 505	15,5	360/430	1600	1310	1395	1340	1395	605	711	110	650	295	40	105	190,5	159	415	321	75	100	5	15	M14	50	
MT 308	10	160/175		1125	1165	1125	1165	520	629		650	295	40	105	190,5	159	415	321	75	100	5	15	M14	50	
	14,5	175/195		1325	1365	1325	1365	620	829																
MT 410	9,5	295/340	2000	1225	1295	1225	1295	570	641	110	730	325	40	127,5	199	184	415	366	91	140	7	17	M20	35	
	14,5	315/360		1425	1495	1425	1495	670	841									432	117			21	M24	38	
MT 610	19,5	540/640		1540	1630	1575	1630	715	873		850	390		157	235	220									
	23	560/660	3200	1645	1735	1680	1735	770	978	155															
	28	800/900		1820	1910	1855	1910	860	1153																
MT 516	7	300/315		1310	1395	1340	1395	605	711		730	325		127,5	199	184		366	101	200	10	17	M20	35	
	11	330/340	5000	1530	1615	1560	1615	715	931	200	730	325	50	127,5	199	184	525	366	101	200	10	17	M20	35	
	14,5	530/570		1750	1835	1780	1835	825	1151					50								432	117		
MT 616	12,5	540/640		1540	1630	1575	1630	715	873		850	390		157	235	220		432	117			21	M24	38	
	30,5	590/650	8000	1645	1735	1680	1735	770	978	240															
	18,5	660/720		1820	1910	1855	1910	860	1153																
MT 625	9,5	540/640		1540	1630	1575	1630	715	873		850	390		157	235	220		432	117	240	12	21	M24	38	
	11	590/650	10000	1645	1735	1680	1735	770	978	240															
	14,5	660/720		1820	1910	1855	1910	860	1153				56					530	128			25	M27	55	
MT 725	15,5	700/780		1890	1925	-	-	890	1143		1000	475		186,5	290,5	270		530	128			25	M27	55	
	19,5	850/915	12500	2100	2135	-	-	995	1353	240															
MT 740	5	790/855		1460	1495	-	-	675	713																
	8	845/910		1675	1710	-	-	785	928		1000	475	71	186,5	290,5	270	695	530	128	300	15	25	M27	55	
	12	900/960	16000	1890	1925	-	-	890	1143	240															
	15	960/1020		2100	2135	-	-	995	1353																
MT 750	5	880/940		1537	1572	-	-	752	713																
	8	940/1000	10000	1752	1787	-	-	862	928	240	1000	475	71	186,5	290,5	270	695	558	128	300	15	31	---	55	
	12	990/1050		1967	2002	-	-	967	1143																
	15	1055/1110		2177	2212	-	-	1072	1353																
MT 763	5	880/940	12500	1537	1572	-	-	752	713	240															
	8	940/1000		1752	1787	-	-	862	928		1000	475	71	186,5	290,5	270	695	558	128	300	15	31	---	55	
	12	990/1050		1967	2002	-	-	967	1143																
	15	1055/1110	16000	2177	2212	-	-	1072	1353	240															
MT 780	5	880/940		1537	1572	-	-	752	713		1000	475	71	186,5	290,5	270	695	558	128	300	15	31	---	55	
	8	940/1000		1752	1787	-	-	862	928																
	12	990/1050	16000	1967	2002	-	-	967	1143	240															
	15	1055/1110		2177	2212	-	-	1072	1353																

Stationary electric wire rope hoist - Reeving 4/1

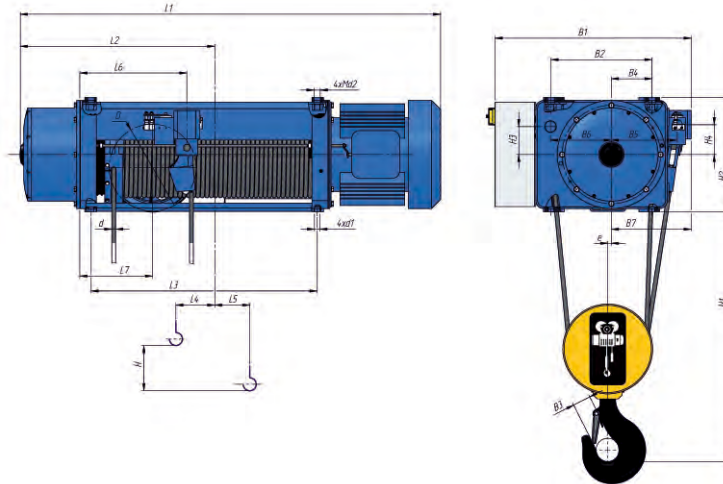

Type	Lifting height, H, m	Weight, kg V1,V2 / V1M1,V2M2	Capacity, kg	General dimensions, mm																													
				L1				L2	L3	L4	L5	L6	L7	B1	B2	B3	B4	B5	B6	B7	H1	H2	H3	H4	D	d	d1	d2	e				
				V1	V1/M1	V2	V2/M2																										
MT 305	6,5	130/150	2000	925	965	925	965	420	429	90	45	250	161	650	295	40	105	189,5	186,5	229,5	415	321	71	75	140	7	15	M14	25				
	10	155/180		1125	1165	1125	1165	520	629	190	-45						300	194	730	325		127,5	206	199	254		366	85	91	200	17	M20	15
	13,5	185/210		1325	1365	1325	1365	620	829	290	-95																						
MT 405	18	365/415		1425	1495	1425	1495	670	841	307	-115	350	216	730	325	40	127,5	206	199	254	415	366	85	101	240		17	M20	15				
20	395/450	1530		1615	1560	1615	715	931	345	-130																							
25,5	495/550	1750		1835	1780	1835	825	1151	455	-185																							
MT 505	6,5	130/150		925	965	925	965	420	429	90	45	250	161	650	295	40	105	189,5	186,5	229,5	415	321	71	75	140		7	15	M14	25			
	10	155/180	1125	1165	1125	1165	520	629	190	-45	300						194	730	325	127,5		206	199	254	366	85		101	240	17	M20	15	
	13,5	185/210	1325	1365	1325	1365	620	829	290	-95																							
MT 410	6	310/350	4000	1025	1095	1025	1095	470	441	65	25	300	194	730	325	50	127,5	206	199	254	525	366	85	91	200	10	17	M20	15				
	9	335/395		1225	1295	1225	1295	570	641	165	-25						400	232	850	390		157	254	235	309		432	109	117	293	21	M24	14
	12,5	365/410		1425	1495	1425	1495	670	841	265	-75																						
MT 610	16,5	540/640		1540	1630	1575	1630	715	873	316	-120	400	232	850	390	50	157	254	235	309	525	432	109	117	293	21	M24	14					
	19	560/660		1645	1735	1680	1735	770	978	367	-145																						
	22,5	800/900		1820	1910	1855	1910	860	1153	455	-190																						
MT 516	5,5	305/370		6300	1090	1175	1120	1175	495	491	67	35	350	216	730	325	56	127,5	206	199	254	565	366	85	101	240	12 (10)	17	M20	15			
	8,5	340/405	1310		1395	1340	1395	605	711	177	-20	400						232	850	390	157		254	235	309	432		109	117	293	21	M24	14
	11,5	395/450	1530		1615	1560	1615	715	931	287	-70																						
MT 616	14,5	580/680	1750		1835	1780	1835	825	1151	397	-125	400	232	850	390	56	157	254	235	309	565	432	109	117	293	21	M24	14					
	13,5	540/640	1540		1630	1575	1630	715	873	316	-120																						
	15,5	560/660	1645		1735	1680	1735	770	978	367	-145																						
MT 625	18,5	800/900	1820		1910	1855	1910	860	1153	455	-190	400	232	850	390	71	157	254	235	309	695	432	109	117	293	15 (13)	21	M24	14				
	5	510/610	1120	1210	1155	1210	505	453	29	61																							
	8	570/670	1330	1420	1365	1420	610	663	134	8																							
	11	540/640	1540	1630	1575	1630	715	873	239	-44																							
	12,5	560/660	1645	1735	1680	1735	770	978	291	-71																							
MT 725	15	800/900	1820	1910	1855	1910	860	1153	291	-71	500	324	1000	475	71	186,5	309	290,5	369	775	530	126	128	360	25	M27	23						
	16,5	990/1050	1890	1925	-	-	890	1143	408	-150																							
	20	1050/1110	2100	2135	-	-	995	1353	512	-202																							
MT 740	8	670/930	16000	1460	1495	-	-	675	713	102	46	500	324	1000	475	71	186,5	309	290,5	369	775	530	126	128	360	18 (15)	25	M27	23				
	11	980/1040		1675	1710	-	-	785	928	210	-8																						
	14	1030/1090		1890	1925	-	-	890	1143	318	-62																						
17	1090/1150	2100		2135	-	-	995	1353	422	-114																							
MT 750	8	680/940	20000	1537	1572	-	-	752	713	102	46	500	324	1000	475	90	186,5	309	290,5	369	825	558	126	128	360	18 (15)	31	—	23				
	11	940/1000		1752	1787	-	-	862	928	210	-8																						
	14	990/1050		1967	2002	-	-	967	1143	318	-62																						
17	1055/1110	2177		2212	-	-	1072	1353	422	-114																							
MT 763	8	880/940	25000	1537	1572	-	-	752	713	102	46	500	324	1000	475	90	186,5	309	290,5	369	825	558	126	128	360	18 (15)	31	—	23				
	11	940/1000		1752	1787	-	-	862	928	210	-8																						
	14	990/1050		1967	2002	-	-	967	1143	318	-62																						
	17	1055/1110		2177	2212	-	-	1072	1353	422	-114																						